
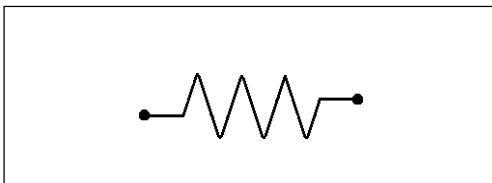


# Serpentina

## Coiled Tubing

452 711

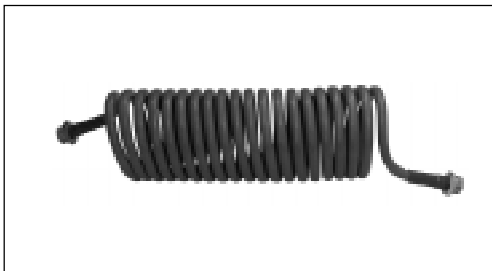

Datos técnicos/ Technical Data:	
Presión de funcionamiento Operating pressure	max. 10 bar
Medio Permissible medium	aire / air
Rango de temperatura Operating temperature range	- 40°C a / to + 70°C
Dimensión Pipe dimension	Ø 9 x 1,5
Diámetro Diameter of Coiled Tube	Ø 110 mm
Serpentina Coils	20
Longitud Extended length	max. 4000 mm

### Propósito:

Conectar los sistemas de aire de la tractora con los del semirremolque o conectar los componentes de un sistema de aire comprimido donde las distancias de conexión pueden variar.

### Requisitos de instalación:

Las serpentinas deben instalarse según norma ISO 1728.


### Purpose:

To connect the truck tractor air brake systems to the semi-trailer or to connect components of a compressed air system where connection distances may vary.

### Installation Requirements:

The Coiled Tubing should be installed in accordance with ISO - Standard 1728.

### Instalación / Installation:

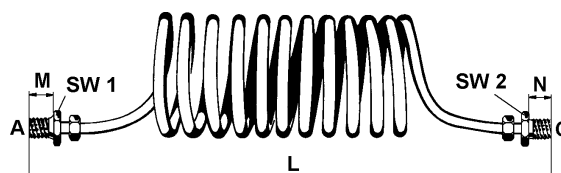

L = Longitud ( serpentina cerrada)  
L = Length (coils closed up)

Referencia Part Number	Color Colour	Dimensiones / Dimensions						
		L	M	SW 1	A	N	SW 2	C
452 711 000 0	blanco	460	12	27	M 22x1,5	12	27	M 22x1,5
452 711 001 0	rojo	460	12	27	M 22x1,5	12	27	M 22x1,5
452 711 002 0	amarillo	460	12	27	M 22x1,5	12	27	M 22x1,5
452 711 003 0	negro	450	12	27	M 22x1,5	12	27	M 22x1,5
452 711 010 0	blanco	420	12	22	M 16x1,5	12	22	M 16x1,5
452 711 011 0	rojo	450	12	22	M 16x1,5	12	22	M 16x1,5
452 711 012 0	amarillo	420	12	22	M 16x1,5	12	22	M 16x1,5
452 711 013 0	negro	420	12	22	M 16x1,5	12	22	M 16x1,5
452 711 021 0	rojo	450	12	22	M 16x1,5	34	22	M 18x1,5
452 711 022 0	amarillo	450	12	22	M 16x1,5	34	22	M 18x1,5
452 711 023 0	negro	450	12*	22	M 16x1,5	12*	22	M 18x1,5
452 711 025 0	negro	480	34	22	M 16x1,5	34	22	M 18x1,5
452 711 026 0	negro	450	12	27	M 22x1,5	12	27	M 22x1,5

\*) con tuerca y roscada

3