

**Lift axle control valve (LACV II)**

463 084 031 0  
463 084 041 0 with quick connector

**Levelling valve**

464 006 002 0  
464 006 100 0 with integral height limiting  
464 006 102 0 with quick connector

Link  
433 401 003 0


**Coupling head with integrated filter**

Supply  
952 201 012 0  
952 201 015 0 with quick connector

Control  
952 201 011 0  
952 201 014 0 with quick connector + test point

**Park Release Emergency Valve (PREV)**

| Product number | Quick connector | Plate | Test point |
|----------------|-----------------|-------|------------|
| 971 002 900 0  | X               | ✓     | X          |
| 971 002 902 0  | X               | X     | X          |
| 971 002 910 0  | ✓               | X     | X          |
| 971 002 911 0  | ✓               | X     | X          |
| 971 002 912 0  | ✓               | ✓     | ✓          |

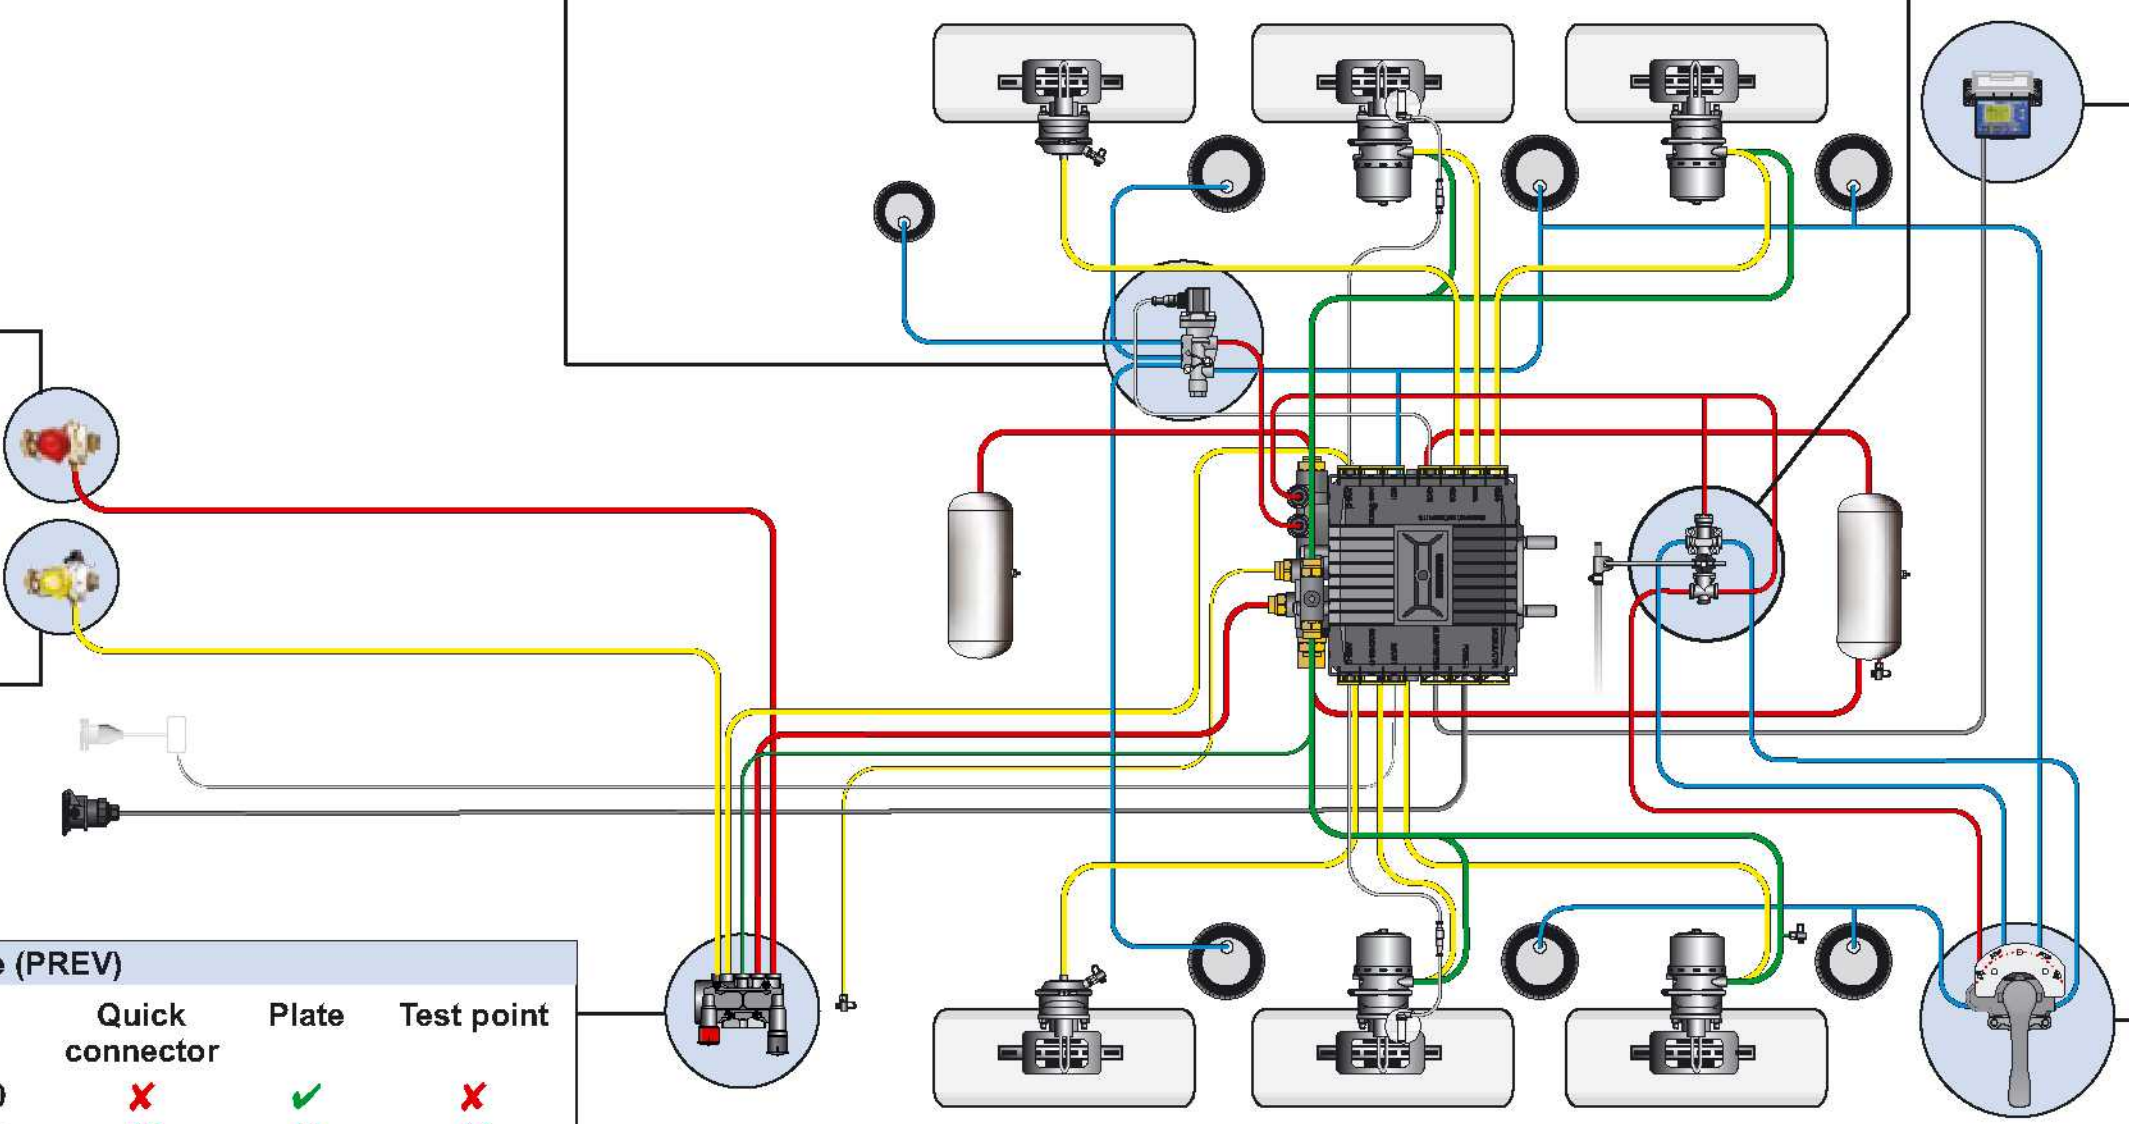

**Information system**

SmartBoard  
446 192 110 0

**Suspension control**

Rotary slide valve  
463 032 020 0  
463 032 220 0 with Quick connector


**Standard with Conventional Air Suspension**

| Trailer EBS E Modulator | Product number | System             | Support mech. suspension | Integrated control air suspension | Number of GIOs | PEM | Quick connector | Supported piping supply | Air susp.  |
|-------------------------|----------------|--------------------|--------------------------|-----------------------------------|----------------|-----|-----------------|-------------------------|------------|
|                         | 480 102 030 0  | Standard, 2S/2M    | X                        | X                                 | 4              | X   | X               |                         |            |
|                         | 480 102 031 0  | Standard, 2S/2M    | X                        | X                                 | 4              | ✓   | ✓               | ∅ 16 × 2                | ∅ 8 × 1    |
|                         | 480 102 032 0  | Standard, 2S/2M    | X                        | X                                 | 4              | X   | ✓               |                         |            |
|                         | 480 102 033 0  | Standard, 2S/2M    | X                        | X                                 | 4              | ✓   | ✓               | ∅ 15 × 1.5              | ∅ 12 × 1.5 |
|                         | 480 102 034 0  | Standard, 2S/2M    | X                        | X                                 | 4              | ✓   | X               |                         |            |
|                         | 480 102 060 0  | Premium, max 4S/3M | ✓                        | ✓                                 | 7              | X   | X               |                         |            |
|                         | 480 102 061 0  | Premium, max 4S/3M | ✓                        | ✓                                 | 7              | ✓   | ✓               | ∅ 16 × 2                | ∅ 8 × 1    |
|                         | 480 102 062 0  | Premium, max 4S/3M | ✓                        | ✓                                 | 7              | X   | ✓               |                         |            |
|                         | 480 102 063 0  | Premium, max 4S/3M | ✓                        | ✓                                 | 7              | ✓   | ✓               | ∅ 15 × 1.5              | ∅ 12 × 1.5 |
|                         | 480 102 064 0  | Premium, max 4S/3M | ✓                        | ✓                                 | 7              | ✓   | X               |                         |            |

**Diagnosis Trailer EBS E**

|  |                                   |   |
|--|-----------------------------------|---|
| Diagnostic Interface with USB interface<br>446 301 022 0                       | Diagnostic cable<br>446 300 361 0 | Connection adapter ISO 7638 with CAN socket<br>446 300 360 0              |
| <b>Option 2</b><br>Diagnostic Interface with serial interface<br>446 301 021 0 | CAN converter<br>446 300 470 0    | Connection adapter ISO 7638 with CAN socket<br>446 300 360 0              |
| <b>Option 3</b><br>Diagnostic Interface USB or serial                          | Diagnostic cable<br>446 300 348 0 | Diagnostic connection with yellow cap (only Premium ECU)<br>449 611 ... 0 |

**Premium with Electronic Air Suspension**

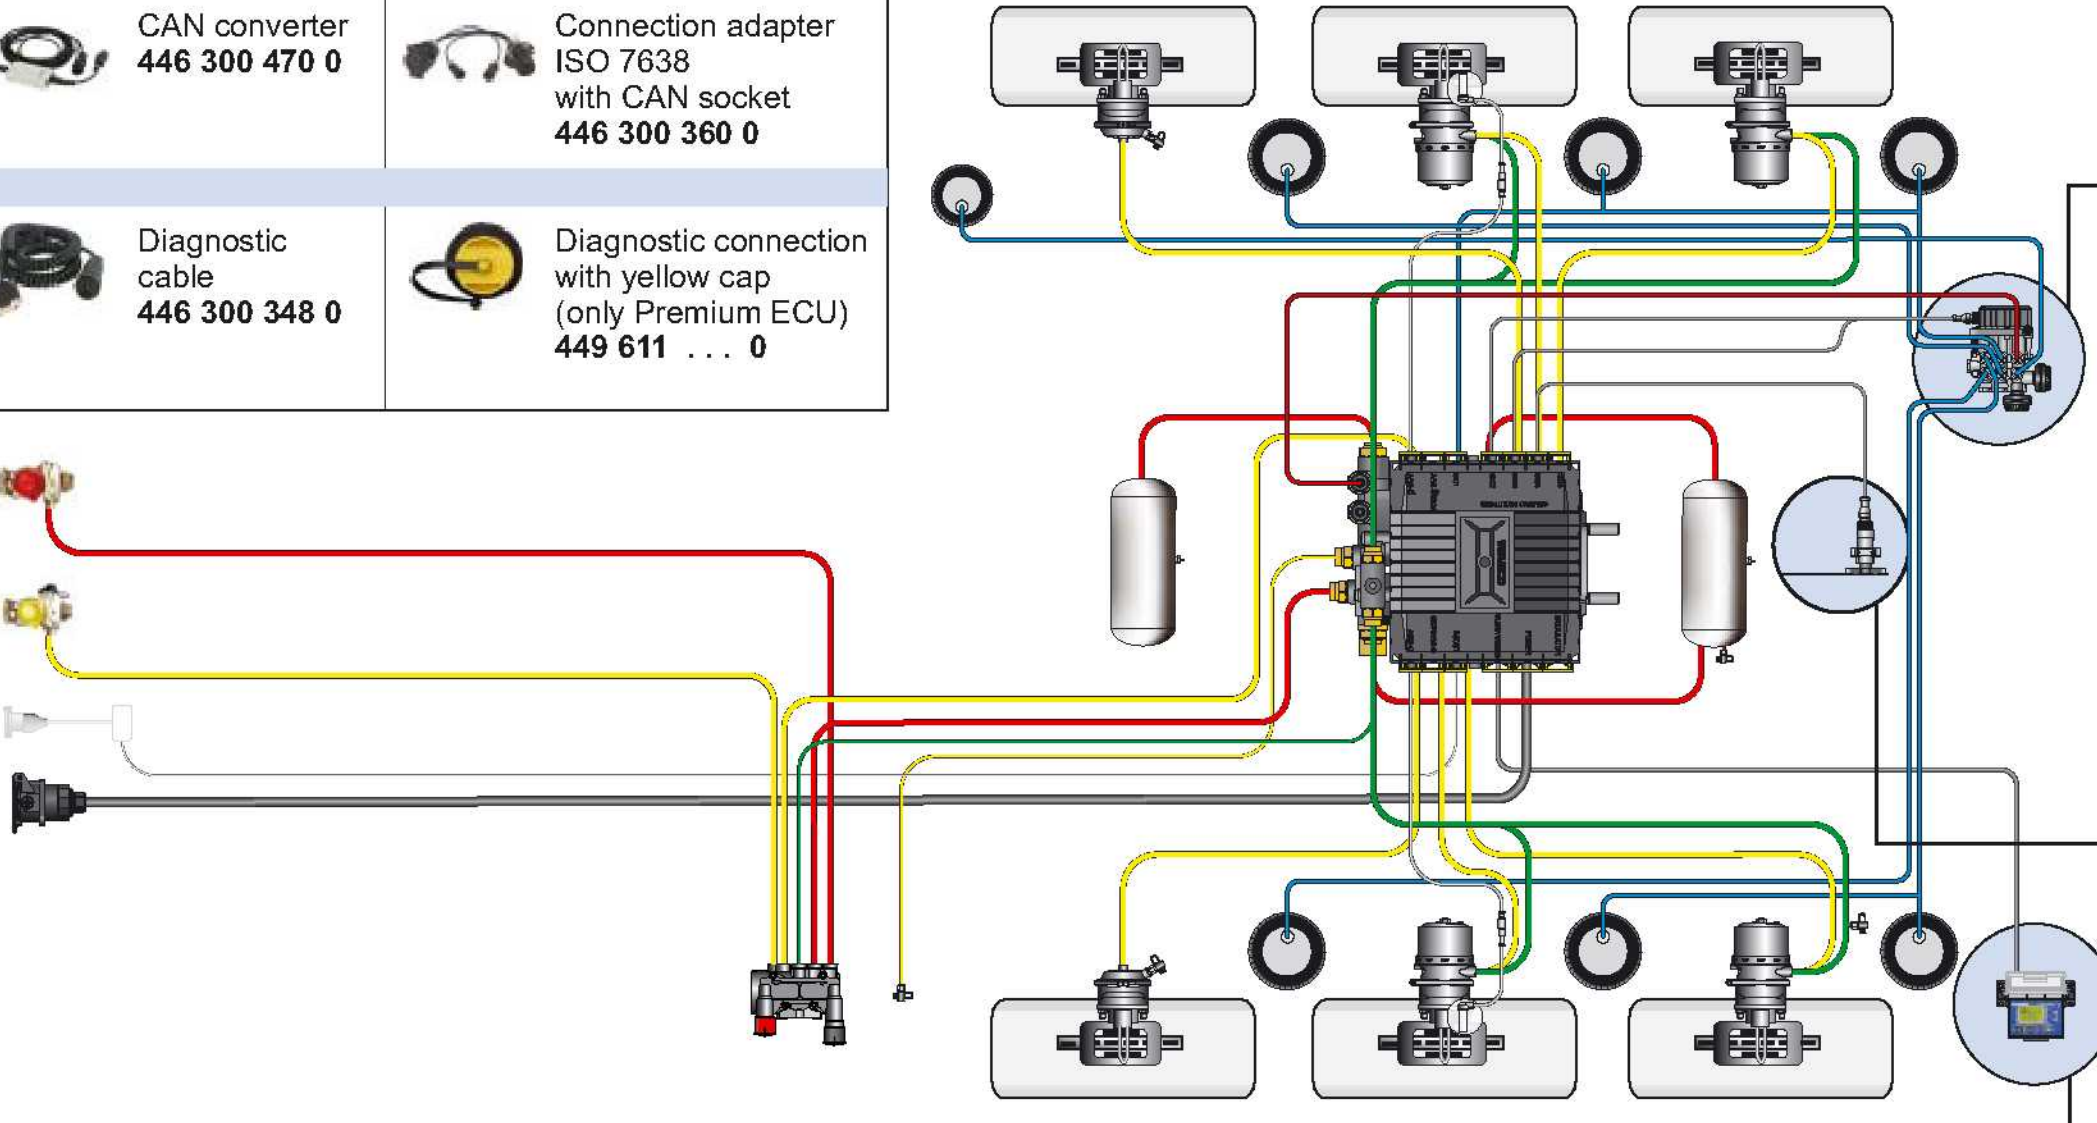

**ECAS solenoid valve**

472 880 030 0 with axle control

472 905 114 0 with axle + lift axle control

**ECAS sensor**

Distance sensor  
441 050 100 0

Lever  
441 050 718 2

Link  
433 401 003 0

**Suspension control**

Remote control  
446 056 25 . 0 tractor and trailer control - from cab - required WABCO CAN2 ECU.

ECAS control box  
446 156 010 0 with axle control  
446 156 011 0 with axle + lift axle control

ECAS remote control  
446 056 116 0 with axle control  
446 056 117 0 with axle + lift axle control

SmartBoard  
446 192 110 0