


Alternative solutions:

400 500 070 0 can be replaced by 400 500 081 0

400 500 081 0 can be replaced by 400 500 082 0

400 500 082 0 can be replaced by 400 500 081 0

Parameter settings needed by trained person using WABCO diagnostic software.

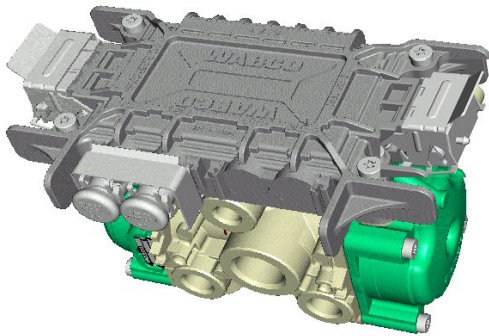

Standard 400 500 070 0

2S/2M


ISO 7638 (24V)

ISO 1185 (supply by stop light / 24N)

Generic IO D1 / D2

Diagnostics via diagnostic plug

Application: semitrailer / central axle trailer
(optional with ECAS or ELM)

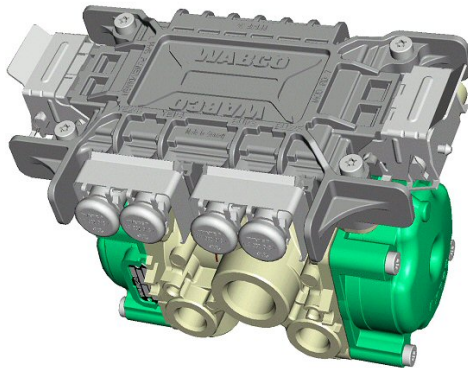

Premium 400 500 081 0

400 500 082 0 (painted)

2S/2M – 4S/3M

ISO 7638 (24V)

ISO 1185 (supply by stop light / 24N)

CAN (ISO 11992)

Ext. ABS relay valve (3rd modulator)

Generic IO D1 / D2 / A1

Diagnostics via diagnostic plug

Application: universal
(optional with ECAS or ELM)